


TARAFLEX® SPORT M PLUS

No. 1 SOLUTION FOR SPORT AND MULTI-PURPOSE

Taraflex® Sport M Plus provides good levels of comfort and safety suited to all types of sports combined with some multi-purpose activities.

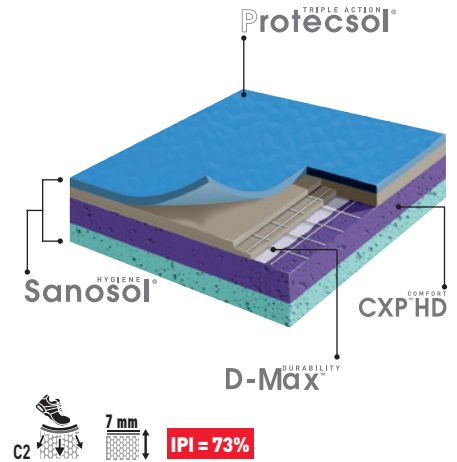

- ▶ **ASTM F2772 Class 2:** ≥ 22% – < 34% shock absorption
- ▶ Ball bounce: ≥ 96%
- ▶ Impact Protection Index (IPI): 73%
- ▶ Dual density foam
- ▶ No wax for life—ease of maintenance
- ▶ Available with the Dry-Tex™ System
 - ▶ Highest moisture tolerance: 98% RH (15 lb)
 - ▶ Up to 70% cost savings compared to third party mitigation systems
 - ▶ Full-spread adhesive installation method: no risk of mold



TARAFLEX® SPORT M PLUS

COMFORT DURABILITY TRIPLE ACTION HYGIENE
CXP^{HD} D-Max™ ProtecSol Sanosol™

No. 1 SOLUTION FOR SPORT AND MULTI-PURPOSE

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
PRODUCT DESCRIPTION				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	D-Max™	
Foam Backing	-	-	Double Density CXP ^{HD}	
Total Thickness	-	-	0.27" (7 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	0.95 lb/ft ² (4.6 kg/m ²)	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86' 6" (26.4 m)	67' 3" (20.5 m)
SPORT PROPERTIES				
Sport Properties	ASTM F2772	Class 1	Class 2	
Safety	ASTM F2772	≥10%	≥22% - <34%	
Vertical Deformation	ASTM F2772	≤ 0.138" (≤ 3.5 mm)	≤ 0.078" (≤ 2 mm)	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 90%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	73%	
Anti-Friction Burns	-	-	ProtecSol™	
TECHNICAL CHARACTERISTICS				
Chemical Product Resistance	ASTM D543	-	Excellent	
Static Load (175 psi)	ASTM F970	-	< 0.005" (< 0.13 mm)	
Static Load (250 psi)	ASTM F970	-	< 0.03" (< 0.7 mm)	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
ENVIRONMENT HEALTH & SAFETY				
Ease of Maintenance	-	-	ProtecSol™ / No wax for life	
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	Complies with REACH	
Antimicrobial Treatment	ISO 22196	-	Sanosol™: Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	Floorscore™	
Recycled Content	MRc3 LEED v4	-	30%	
INSTALLATION METHOD				
Full-Spread Adhesive	ASTM F2180 (F1869)	≤ 80% RH (≤ 5 lb)		
Moisture Mitigation System	ASTM F2180 (F1869)	≤ 92% RH (≤ 10 lb)	ISOLSPORT	
Dry-Tex™ System	ASTM F2180 (F1869)	≤ 98% RH (≤ 15 lb)		
Eco-Fit™ System	-	-	-	
WARRANTY	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			